

Teledyne RD Instruments

Workhorse Monitor


Direct Reading 1200, 600, 300 kHz ADCP

Real-Time Current Monitoring

The MONITOR is Teledyne RD Instruments' most popular direct-reading Acoustic Doppler Current Profiler (ADCP). The unit is typically bottom frame-mounted and hard-wired to shore to provide real-time monitoring of coastal currents.

The Monitor's high data accuracy and reliability make it a favorite for deployments in high-volume traffic areas such as ports and harbors, where the data is often integrated into a Vessel Traffic Monitoring System. In fact, the Monitor has been selected for most major port programs undertaken in the United States.

The Monitor offers a choice of three frequencies and ranges, to meet a wide array of data requirements. The unit also offers a flexible upgrade path, which includes an external battery pack, pressure sensor, bottom tracking capability for moving boat applications, and directional wave measurement.

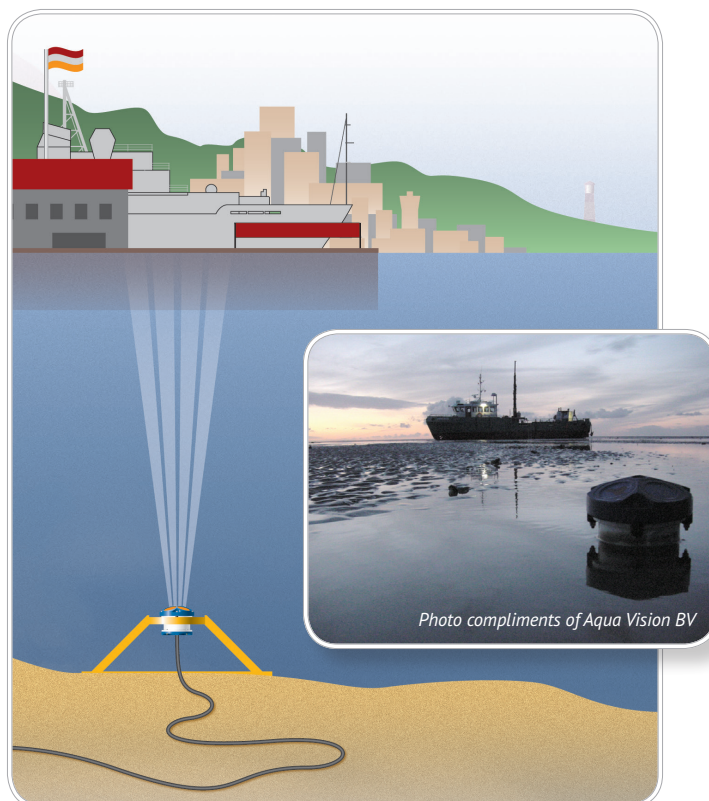

PRODUCT FEATURES

- **Extreme accuracy and reliability:** The Monitor is ideally suited for the most demanding environments, including high traffic areas such as ports and harbors.
- **Precision data:** Teledyne RDI's Broadband signal processing delivers very low-noise data, resulting in unparalleled data resolution and minimal power consumption.
- **Versatility:** This direct reading unit can easily be upgraded to tackle a wide variety of coastal applications. Typical upgrades include pressure sensor, external battery pack, bottom tracking, and directional wave measurement—a single instrument can do it all!
- **A four-beam solution:** Teledyne RDI's 4-beam design improves data reliability by providing a redundant data source in the case of a blocked or damaged beam; improves data quality by delivering an independent measure known as error velocity; and improves data accuracy by reducing variance in your data.



Workhorse Monitor

Direct Reading 1200, 600, 300 kHz ADCP



TECHNICAL SPECIFICATIONS

Water Profiling	Depth Cell Size ¹	Typical Range ² 12m 1200kHz		Typical Range ² 50m 600kHz		Typical Range ² 110m 300kHz	
	Vertical Resolution	Range ³	Std. Dev. ⁴	Range ³	Std. Dev. ⁴	Range ³	Std. Dev. ⁴
	0.25m	11m	14.0cm/s				
	0.5m	12m	7.0cm/s	38m	14.0cm/s	see note ¹	
	1m	13m	3.6cm/s	42m	7.0cm/s	83m	14.0cm/s
	2m	15m ²	1.8cm/s	46m	3.6cm/s	93m	7.0cm/s
	4m	see note ¹		51m ²	1.8cm/s	103m	3.6cm/s
	8m					116m ²	1.8cm/s
Long Range Mode	2m	19m	3.4m/s				
	4m			66m	3.6cm/s		
	8m					154m	3.7cm/s
Profile Parameters	Velocity Accuracy	0.3% of water velocity relative to ADCP ±0.3cm/s		0.3% of water velocity relative to ADCP ±0.3cm/s		0.5% of water velocity relative to ADCP ±0.5cm/s	
	Velocity resolution	0.1cm/s		0.1cm/s		0.1cm/s	
	Velocity range	±5m/s default, ±20m/s max		±5m/s default, ±20m/s max		±5m/s default, ±20m/s max	
	Number of depth cells	1–255		1–255		1–255	
	Ping rate	2Hz (typical)		2Hz (typical)		2Hz (typical)	
Echo Intensity Profile	Vertical resolution			Depth cell size, user configurable			
	Dynamic range			80dB			
	Precision			±1.5dB			
Transducer and Hardware	Beam angle	20°					
	Configuration	4-beam, convex					
	Internal memory	Two PCMCIA card slots; no memory card included					
	Communications	Serial port selectable by switch for RS-232 or RS-422. ASCII or binary output at 1200-115,200 baud					
Environmental	Standard depth rating	200m; optional to 500m, 1000m, 6000m					
	Operating temperature	-5° to 45°C					
	Storage temperature (without batteries)	-30° to 60°C					
	Weight in air	7.0kg					
	Weight in water	3.0kg					
Software	TRDI's Windows™-based software included: WinSC —Data Acquisition System; WinADCP —Data Display and Export;						
Power	Input Power	20–50VDC					
Standard Sensors	Temperatures (mounted on transducer)	Range -5° to 45°C, Precision ±0.4°C, Resolution 0.01°					
	Tilt	Range ±15°, Accuracy ±0.5°, Precision ±0.5°, Resolution 0.01°					
	Compass (fluxgate type, includes built-in field calibration feature)	Accuracy ±2° ⁵ , Precision ±0.5° ⁵ , Resolution 0.01°, Maximum tilt ±15°					
Available Options	<ul style="list-style-type: none">• Memory: 2 PCMCIA slots; total 4GB• Pressure sensor• External battery case• High-resolution water-profiling modes• Bottom tracking• AC/DC power converter, 48VDC output• Conversion kit for internal power supply and memory• Directional Waves Array• Velocity—Data Display, Processing, and Export software						
Dimensions	228.0mm wide x 201.5mm long (line drawings available upon request)						

¹ User's choice of depth cell size is not limited to the typical values specified.

² Longer ranges available.

³ Profiling range based on temperature values at 5°C and 20°C, salinity = 35ppt.

⁴ BroadBand mode single-ping standard deviation (Std. Dev.).

⁵ <±1.0° is commonly achieved after calibration.